


# ULTRA VIBRATO UV300

Classic Vibrato Effects Pedal

Thank you for showing your confidence in us by purchasing the BEHRINGER ULTRA VIBRATO UV300. This high-quality effects pedal delivers the classic pitch modulation and dimensional vibrato effects of the '60s and '70s. Its comprehensive controls allow you to tailor the UV300 performance right for your needs.

## 1. Controls

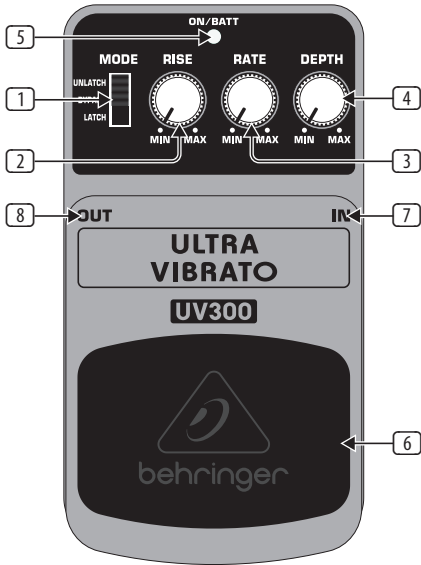

- 1 The **MODE** switch changes the functionality of the effects pedal footswitch. When set to **LATCH**, the effect will be activated/deactivated by pressing the pedal once. When set to **UNLATCH**, the effect will only be active if you depress the pedal. The **BYPASS** mode can be selected when no vibrato effect is required. The input signal remains unaffected even if the pedal is depressed.
- 2 The **RISE** control adjusts the time needed for the effect to reach its maximum detuning. Modulation sets in more slowly when it is turned clockwise.
- 3 The **RATE** control determines the speed of the vibrato effect.
- 4 The **DEPTH** control adjusts the intensity of the pitch modulation effect.
- 5 The **ON/BATT** LED illuminates when the effect is activated. It also serves as a battery level indicator.
- 6 Use the footswitch to activate/deactivate the effect.
- 7 Use this 1/4" TS **IN** connector to plug in the instrument cable.
- 8 The 1/4" TS **OUT** connector sends the signal to your amp.

Use the **DC IN** connection to plug in a 9 V power supply (not included).

The **BATTERY COMPARTMENT** is located underneath the pedal cover. To install or replace the 9 V battery (not included), press the hinges with a ballpoint pen and remove the pedal cover. Be careful not to scratch the unit.

- ◆ **The UV300 has no on/off switch. As soon as you insert the plug into the in connector, the UV300 is on. When not in use, remove the plug from the in connector. This extends the life of the battery.**

The **SERIAL NUMBER** is located at the underside.

## 2. Safety Instructions

Do not use near water, or install near heat sources. Use only authorized attachments/accessories. Do not service product yourself. Contact our qualified servicing personnel for servicing or repairs, especially when power supply cord or plug is damaged.

## 3. Warranty

Please register your new BEHRINGER equipment right after your purchase by visiting <http://behringer.com> and read the terms and conditions of our warranty carefully.

## 4. Specifications

In	
Connector	¼" TS
Impedance	500 kΩ

Out	
Connector	¼" TS
Impedance	1 kΩ

Power Supply	
	9 V $\overline{\text{=}}$ , 100 mA regulated

### BEHRINGER PSU-SB

USA/Canada	120 V~, 60 Hz
China/Korea	220 V~, 50 Hz
U.K./Australia	240 V~, 50 Hz
Europe	230 V~, 50 Hz
Japan	100 V~, 50 - 60 Hz

Power connector	2 mm DC jack, negative center
Battery	9 V type 6LR61
Power consumption	30 mA

Physical/Weight	
Dimensions (H x W x D)	approx. 2 ⅛ x 2 ¾ x 4 ⅞" approx. 54 x 70 x 123 mm
Weight	approx. 0.73 lbs / 0.33 kg

BEHRINGER is constantly striving to maintain the highest professional standards. As a result of these efforts, modifications may be made from time to time to existing products without prior notice. Specifications and appearance may therefore differ from those listed or shown.

MUSIC Group accepts no liability for any loss which may be suffered by any person who relies either wholly or in part upon any description, photograph, or statement contained herein. Technical specifications, appearances and other information are subject to change without notice. All trademarks are the property of their respective owners. MIDAS, KLARK TEKNIK, LAB GRUPPEN, LAKE, TANNOR, TURBOSOUND, TC ELECTRONIC, TC HELICON, BEHRINGER and BUGERA are trademarks or registered trademarks of MUSIC Group IP Ltd.

© MUSIC Group IP Ltd. 2017 All rights reserved.